

- EXPLANATION**
- Drainage basin boundary (Approximate)
 - · - · - Approximate land-surface contact between Columbia River Basalt Group and crystalline rocks
 - Well tapping only upper aquifer zone
 - Well tapping primary aquifer system (Well-numbering systems explained in text, page 13; records of wells tapping primary aquifer system presented in table 4.)
 - ▲ Streamflow gaging station for which long-term continuous records are available
 - △ Site of miscellaneous streamflow measurements on Sept. 11, 1974 to determine stream gains and losses
 - Site of treated-sewage discharge into surface-water system
 - Site of university or public-supply well pumping from primary aquifer system during Jan. 1971-Dec. 1975, at average annual rate listed below:

Pullman Well Field	
Cell (18,18), City of Pullman well 6:	550 acre-feet
Cell (20,18), City of Pullman wells 2 and 4:	575 acre-feet
Cell (20,22), WSU well 5:	175 acre-feet
Cell (21,17), City of Pullman wells 1 and 3:	600 acre-feet
Cell (21,18), WSU wells 1, 2, 3, and 4:	1850 acre-feet
Cell (23,17), City of Pullman well 5:	425 acre-feet
Moscow Well Field	
Cell (19,33), City of Moscow well 8:	1000 acre-feet
Cell (19,35), City of Moscow well 6:	600 acre-feet
Cell (20,33), UI well 3:	825 acre-feet

Finite difference grid, superimposed on map, is explained in text, on page 54.

Base from U.S. Geological Survey, Alben, 1964, Corfax South, 1964, Ewartville, 1964, Pullman, 1964, Washington; Moscow West, 1964, Viola, 1964, Washington-Idaho; Moscow East, 1960, Moscow Mtn., 1960, Robinson Lake, 1960, Idaho.





PLATE 1.-- Sites for data collection used in the development of the digital model of the primary aquifer system in the Pullman-Moscow basin, Washington and Idaho, and pumpage at selected sites.

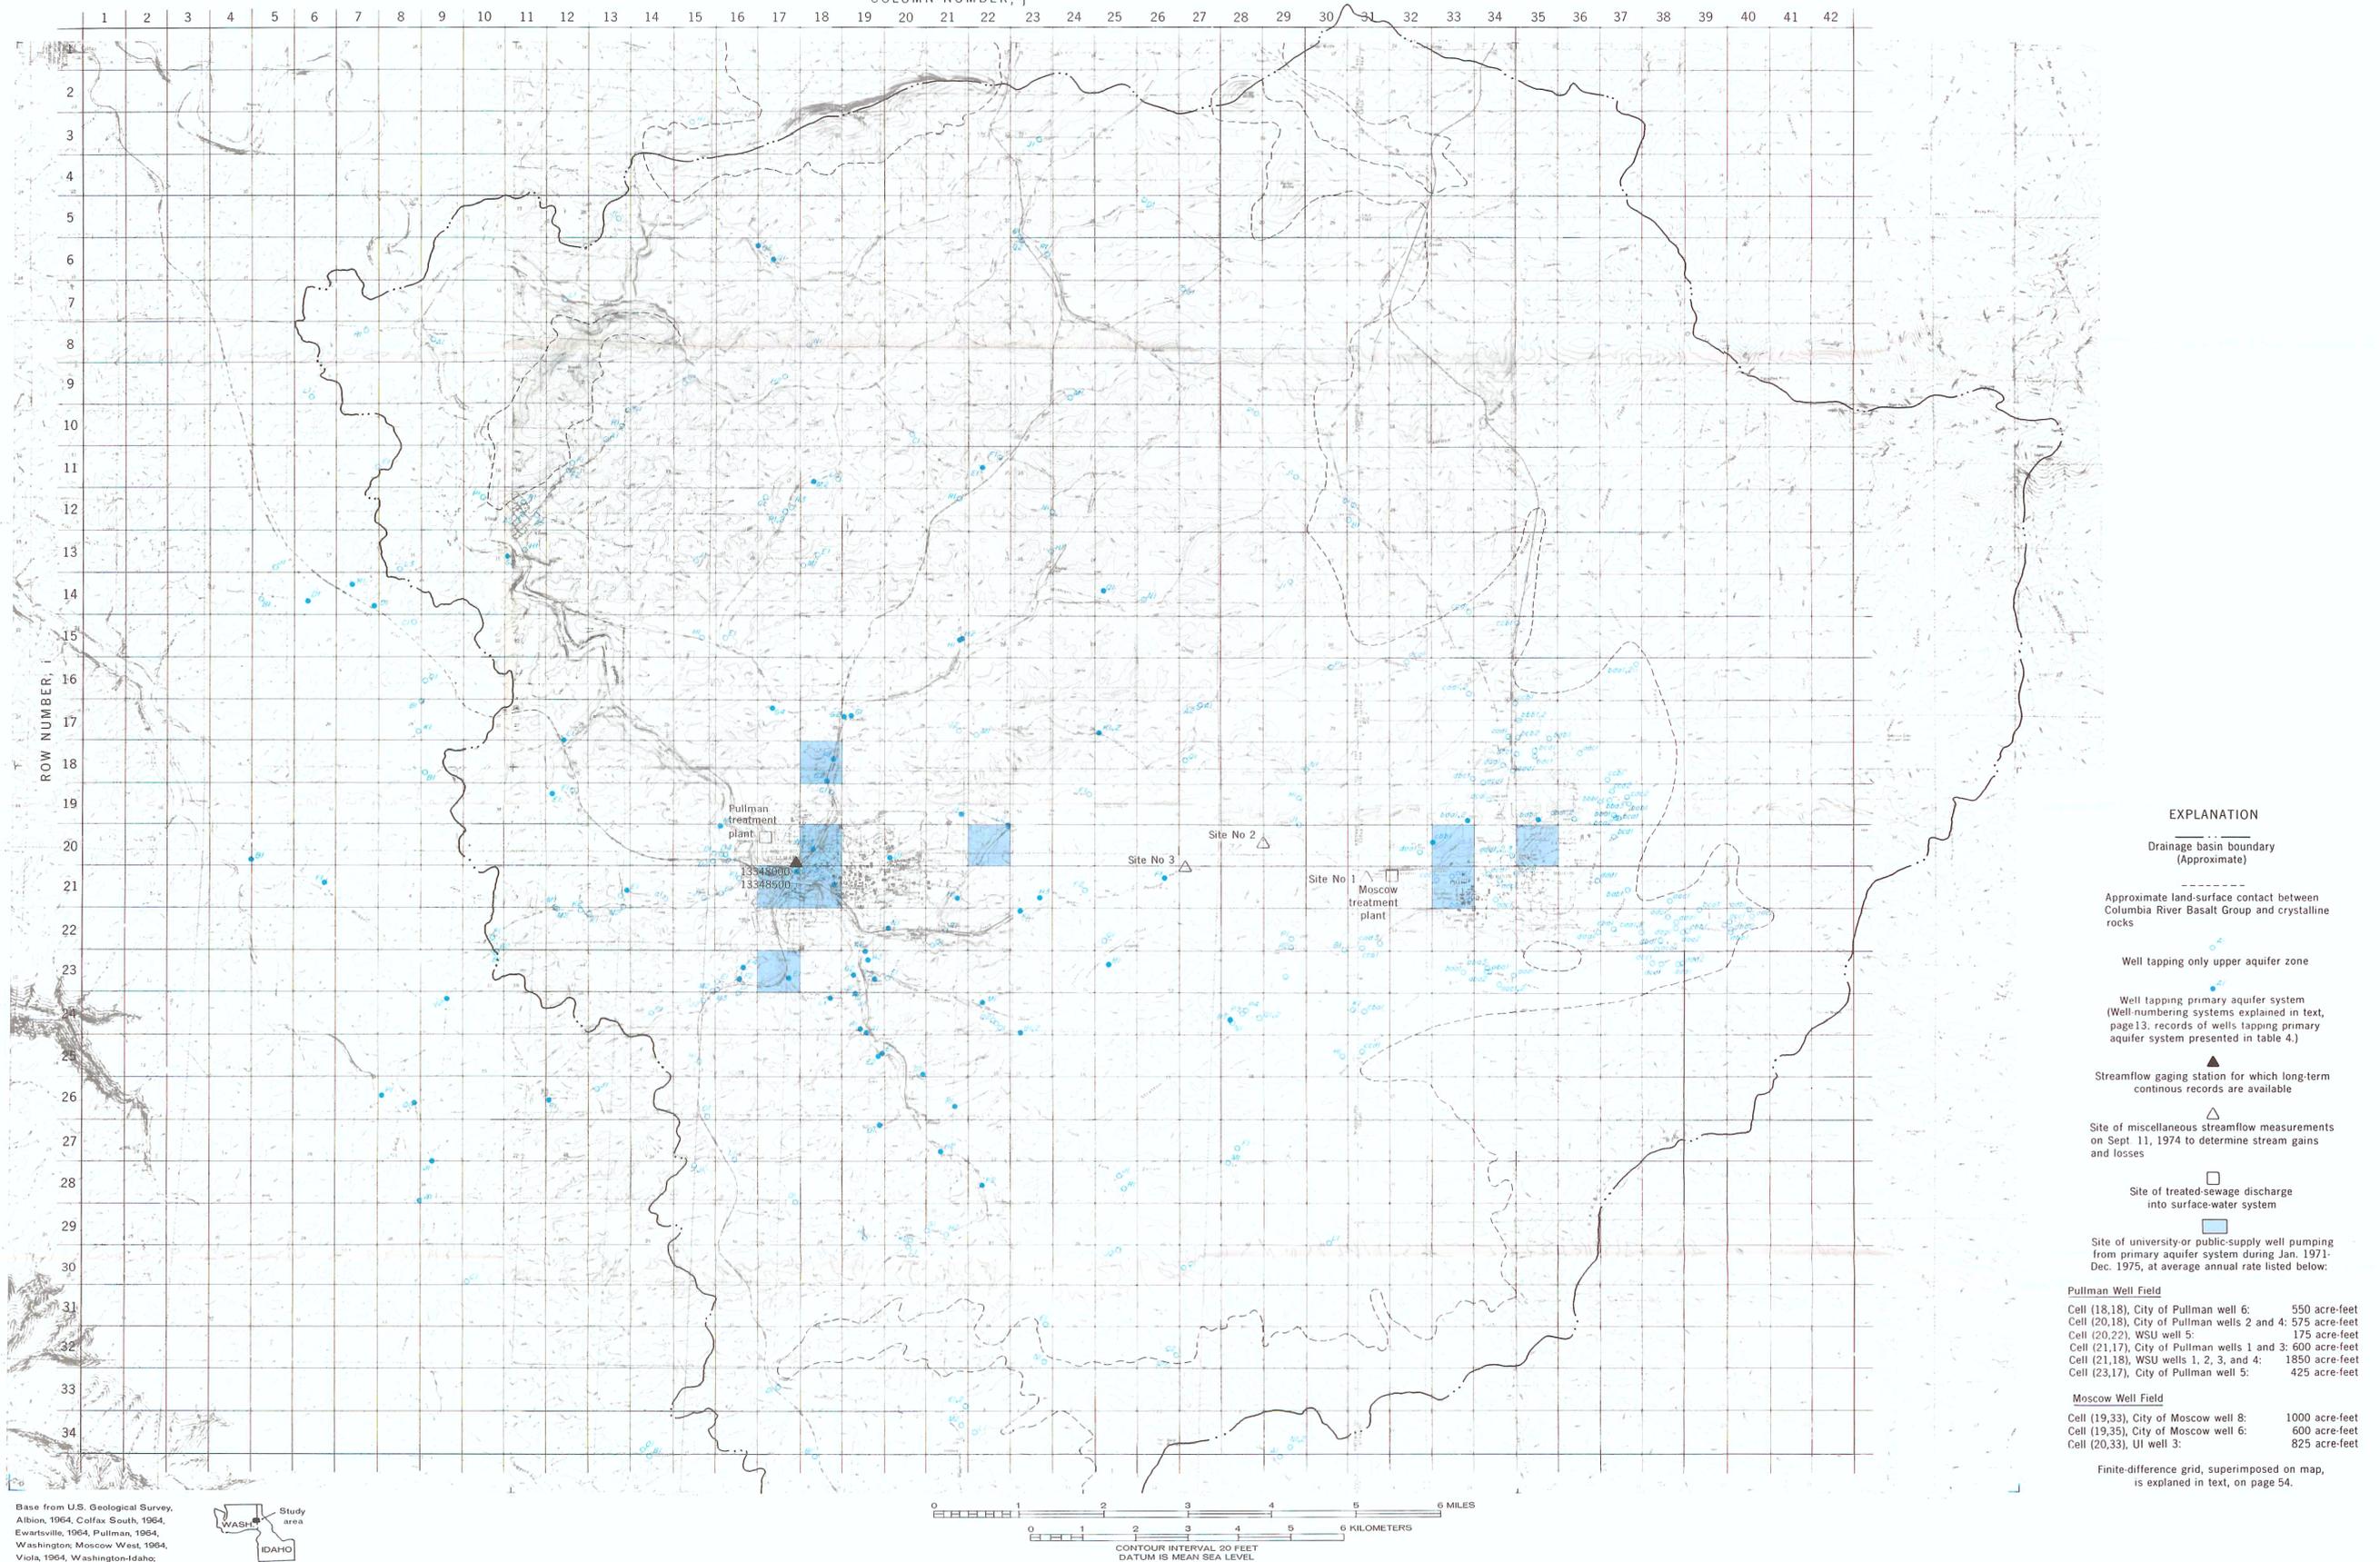


- EXPLANATION**
- Drainage basin boundary (Approximate)
 - - - - - Approximate land-surface contact between Columbia River Basalt Group and crystalline rocks
 - Well tapping only upper aquifer zone
 - Well tapping primary aquifer system (Well numbering systems explained in text, page 13; records of wells tapping primary aquifer system presented in table 4.)
 - ▲ Streamflow gaging station for which long-term continuous records are available
 - △ Site of miscellaneous streamflow measurements on Sept. 11, 1974 to determine stream gains and losses
 - Site of treated-sewage discharge into surface-water system
 - Site of university or public-supply well pumping from primary aquifer system during Jan. 1971-Dec. 1975, at average annual rate listed below:

Pullman Well Field		
Cell (18,18), City of Pullman well 6:		550 acre-feet
Cell (20,18), City of Pullman wells 2 and 4:		575 acre-feet
Cell (20,22), WSU well 5:		175 acre-feet
Cell (21,17), City of Pullman wells 1 and 3:		600 acre-feet
Cell (21,18), WSU wells 1, 2, 3, and 4:		1850 acre-feet
Cell (23,17), City of Pullman well 5:		425 acre-feet
Moscow Well Field		
Cell (19,33), City of Moscow well 8:		1000 acre-feet
Cell (19,35), City of Moscow well 6:		600 acre-feet
Cell (20,33), UI well 3:		825 acre-feet

Finite-difference grid, superimposed on map, is explained in text, on page 54.

Base from U.S. Geological Survey, Albion, 1964, Coffax South, 1964, Ewartsville, 1964, Pullman, 1964, Washington; Moscow West, 1964, Viola, 1964, Washington-Idaho; Moscow East, 1960, Moscow Mtn., 1960, Robinson Lake, 1960, Idaho.

PLATE 1.-- Sites for data collection used in the development of the digital model of the primary aquifer system in the Pullman-Moscow basin, Washington and Idaho, and pumpage at selected sites.

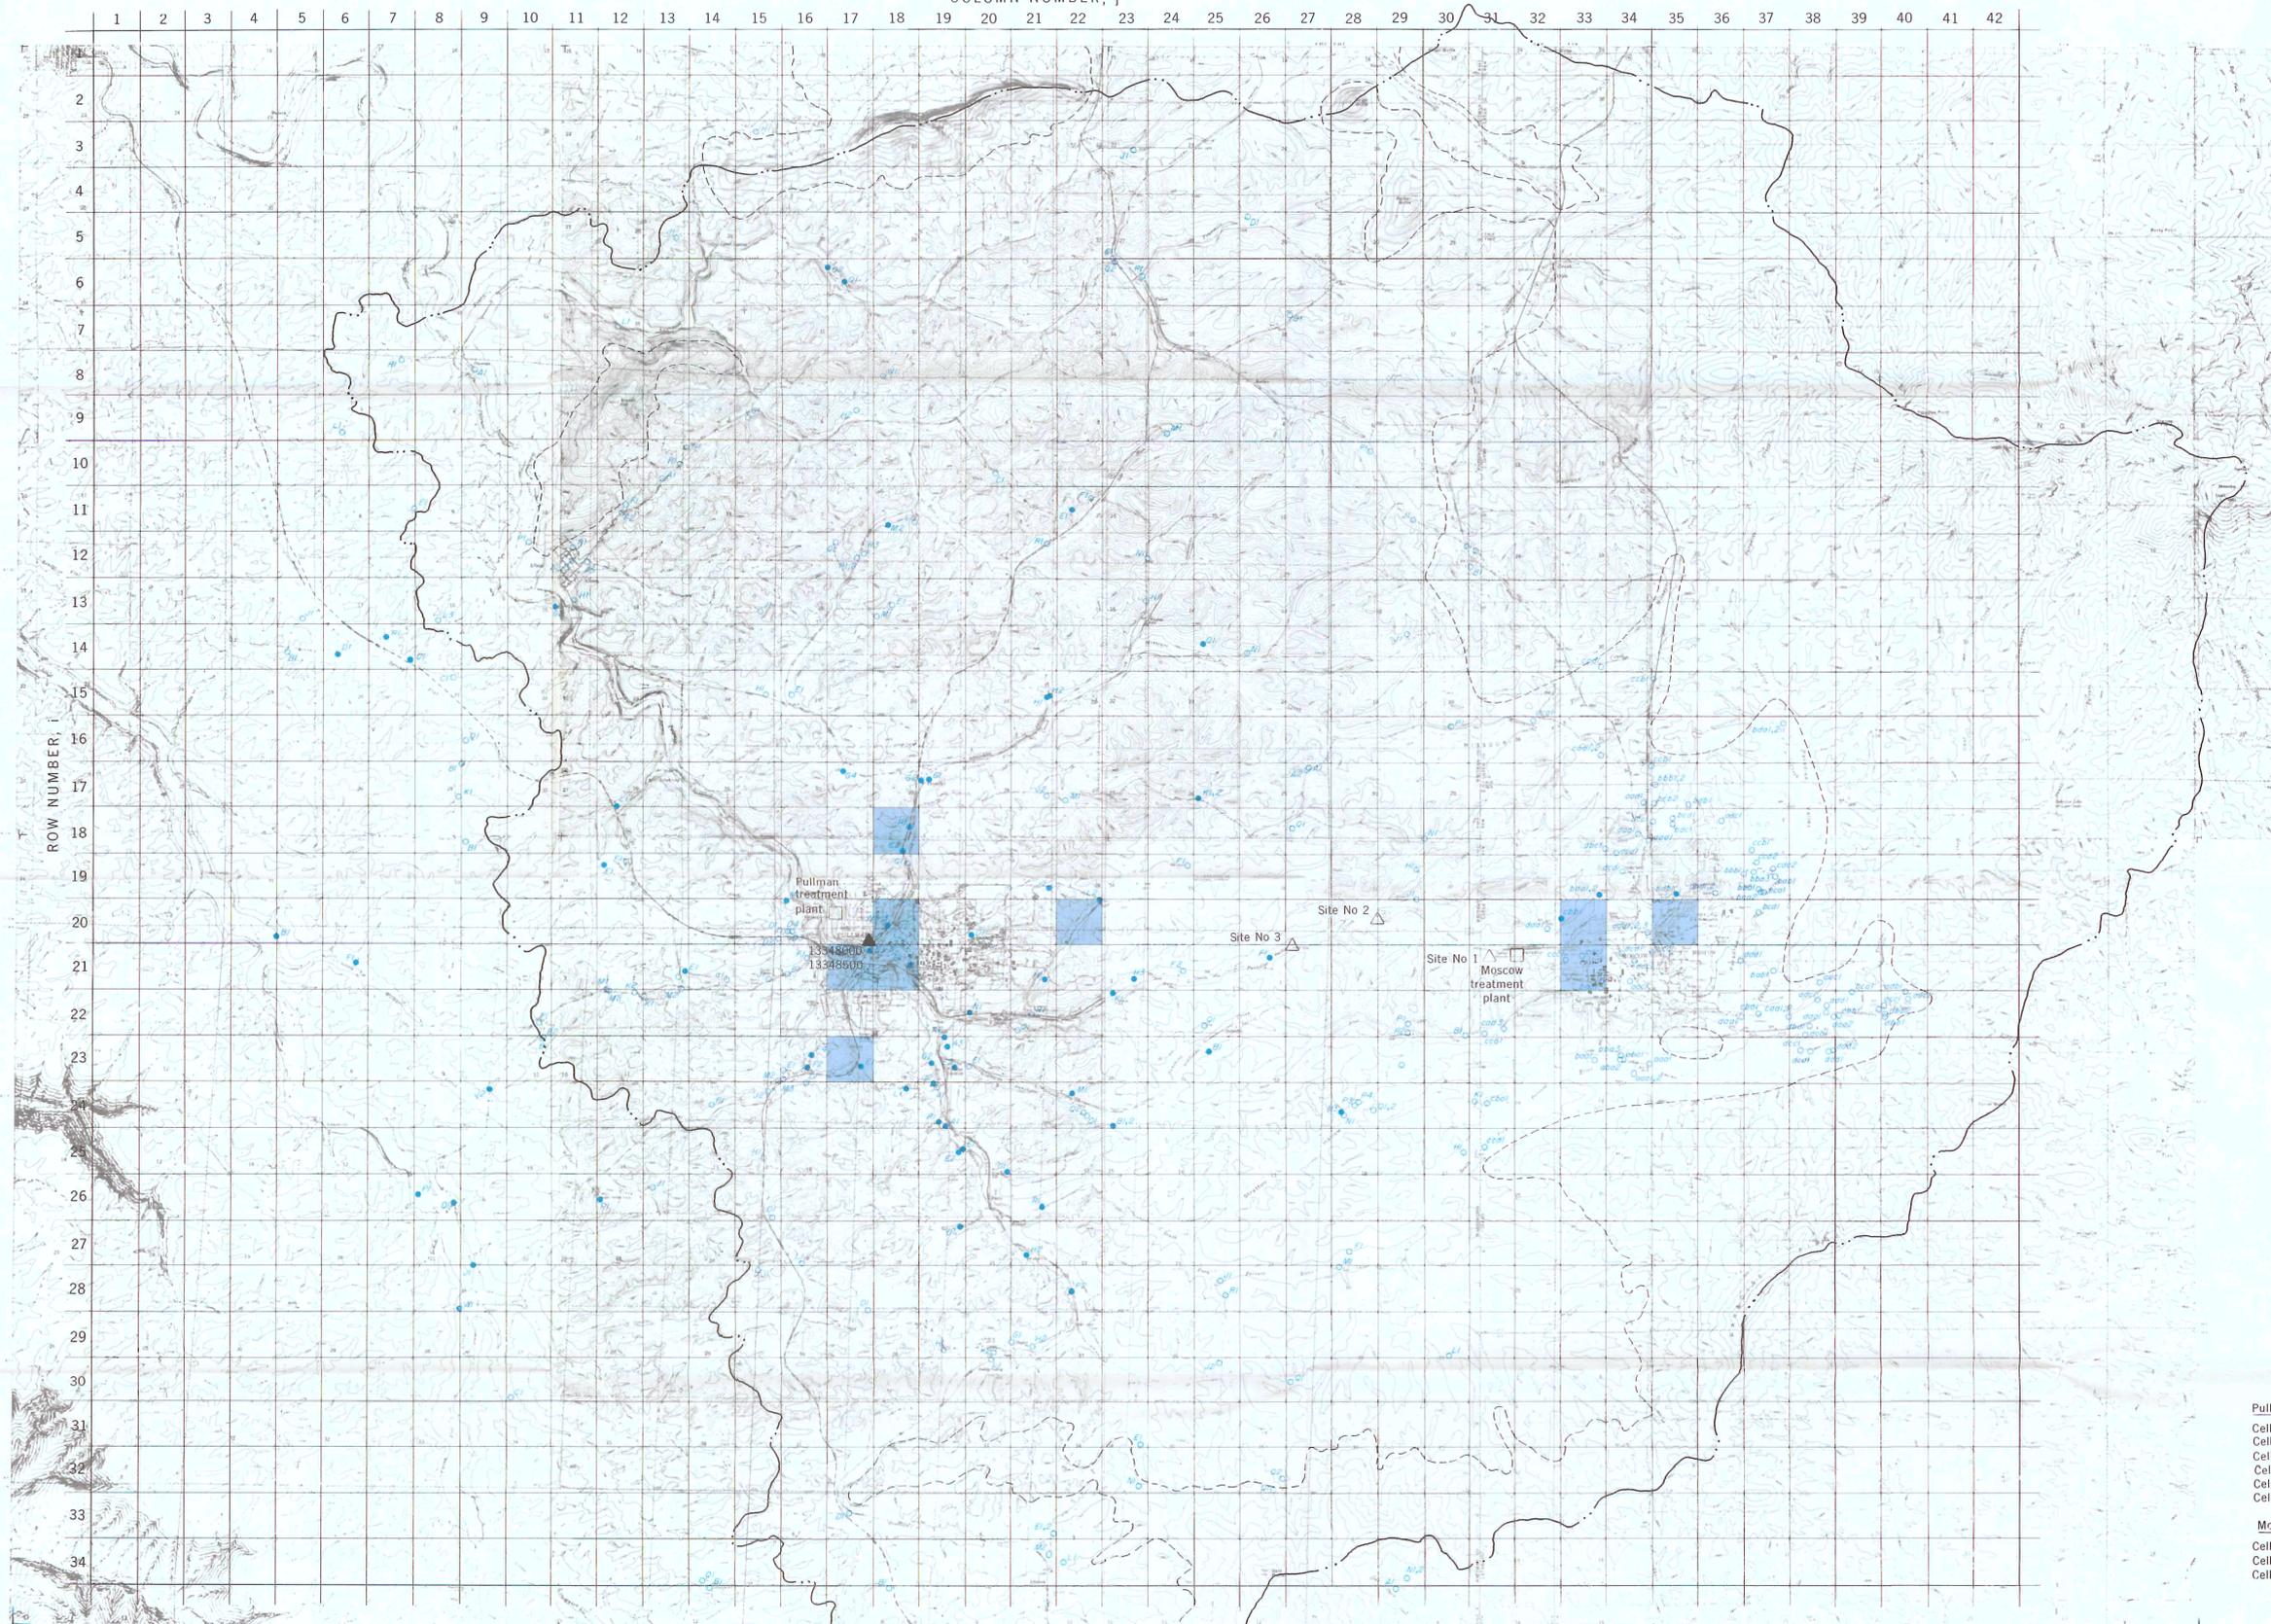

EXPLANATION

- Drainage basin boundary (Approximate)
- - - - - Approximate land-surface contact between Columbia River Basalt Group and crystalline rocks
- Well tapping only upper aquifer zone
- Well tapping primary aquifer system (Well-numbering systems explained in text, page 13; records of wells tapping primary aquifer system presented in table 4.)
- ▲ Streamflow gaging station for which long-term continuous records are available
- △ Site of miscellaneous streamflow measurements on Sept. 11, 1974 to determine stream gains and losses
- Site of treated-sewage discharge into surface-water system
- Site of university- or public-supply well pumping from primary aquifer system during Jan. 1971- Dec. 1975, at average annual rate listed below:

Pullman Well Field

Cell (18,18), City of Pullman well 6:	550 acre-feet
Cell (20,18), City of Pullman wells 2 and 4:	575 acre-feet
Cell (20,22), WSU well 5:	175 acre-feet
Cell (21,17), City of Pullman wells 1 and 3:	600 acre-feet
Cell (21,18), WSU wells 1, 2, 3, and 4:	1850 acre-feet
Cell (23,17), City of Pullman well 5:	425 acre-feet

Moscow Well Field

Cell (19,33), City of Moscow well 8:	1000 acre-feet
Cell (19,35), City of Moscow well 6:	600 acre-feet
Cell (20,33), UI well 3:	825 acre-feet

Finite-difference grid, superimposed on map, is explained in text, on page 54.

Base from U.S. Geological Survey, Albion, 1964, Coffax South, 1964, Ewartsville, 1964, Pullman, 1964, Washington, Moscow West, 1964, Viola, 1964, Washington-Idaho, Moscow East, 1960, Moscow Mtn., 1960, Robinson Lake, 1960, Idaho.




PLATE 1.-- Sites for data collection used in the development of the digital model of the primary aquifer system in the Pullman-Moscow basin, Washington and Idaho, and pumpage at selected sites.